

## Characteristics

- Unbalanced Mechanical Seal.
- Dependent on direction of rotation.



## Operating Limits

**p:** 6 Bar ; **V:** 10 m/s


**t:** -15 / +80°C

\*La temperatura viene condicionada por la selección de materiales.

\*Los límites operativos están condicionados por el factor PV.

## Description

Sleeve mounted, rubber bellow seals of compact unitised design. Suitable for small shaft diameter, general low pressure applications.

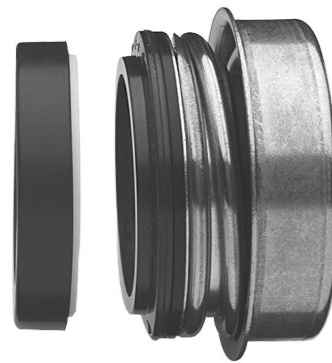

## STK P70

Imperial Shaft Size DØ	Size Code	D1		D3		D4		D5		L1		L2	
		Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric
0.500	0127	0.984	25.00	1.124	28.56	0.559	14.20	1.248	31.70	0.520	13.20	0.197	5.00
0.625	0158	1.220	31.00	1.435	36.45	0.717	18.20	1.625	41.27	0.583	14.80	0.197	5.00
0.750	0191	1.378	35.00	1.575	40.00	0.843	21.40	1.720	43.70	0.610	15.50	0.197	5.00
1.125	0286	1.890	48.00	2.047	52.00	1.220	31.00	2.250	57.15	0.748	19.00	0.315	8.00

## STK P75

Imperial Shaft Size DØ	Size Code	D1		D3		D4		D5		L1		L2	
		Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric	Imperial	Metric
0.500	0127	1.000	25.40	1.124	28.56	0.559	14.20	1.248	31.70	0.543	13.79	0.312	7.93
0.625	0158	1.250	31.75	1.435	36.45	0.717	18.20	1.625	41.27	0.605	15.36	0.406	10.31
0.750	0191	1.375	34.93	1.575	40.00	0.843	21.40	1.720	43.70	0.605	15.36	0.406	10.31