



Stramek produce the entire range of seals and associated components commonly found on the 1.000" and 1.500" shaft A.P.V.® Puma® pumps, in single or double seal configurations.

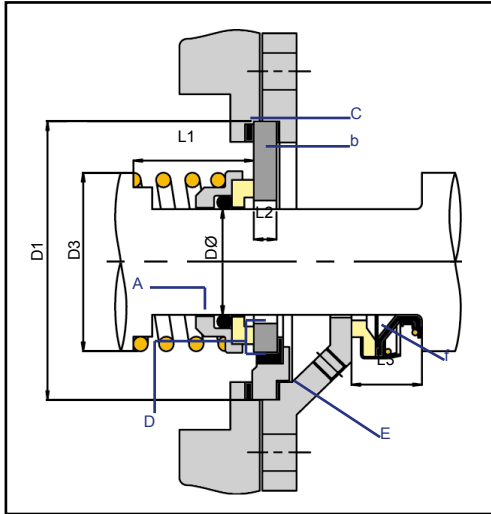

XXXX.26.N.C.SEAL



XXXX.26.N.C.SEAT



XXXX.26.S.S.D



SHAFT SIZE DØ	SIZE CODE	D1	D3	L1	L2	L3
1.000	0254	41.20	68.20	25.40	7.80	14.00
1.500	0381	55.70	80.10	33.30	9.00	17.00

Stramek STOCK CODES.

Where XXXX is stated in the codes below, utilise 0254 for 1.000" or 0381 for 1.500" shaft size as required.

If E.P. or Viton® is required, replace the N with an E or V respectively.

INTERNAL SEAL = A

- XXXX.26.N.C.SEAL STK 26 'O'-Ring mounted rotary with inserted Carbon face.
- XXXX.26.N.S.SEAL STK 26 'O'-Ring mounted rotary with inserted Silicon Carbide face.
- XXXX.26.N.H.SEAL STK 26 'O'-Ring mounted rotary with inserted Tungsten Carbide face.

SEAT ARRANGEMENT ONE = B and C

- XXXX.26.S.S. STK 26 Monolithic Stainless Steel stationary plate, lapped one side.
- XXXX.26.S.S.D. STK 26 Monolithic Stainless Steel stationary plate, lapped both sides.
- XXXX.26.C.C.D. STK 26 Monolithic Ceramic stationary plate, lapped both sides.
- XXXX.26.N.C.GASK Gasket set, with flat and L-shaped gasket, for above plate seat.

SEAT ARRANGEMENT TWO = D and C

- XXXX.26.N.C.SEAT STK 26 boot mounted Ceramic seat, inserted in a stainless steel adaptor.
- XXXX.26.N.S.SEAT STK 26 boot mounted Silicon Carbide seat, inserted in a stainless adaptor.
- XXXX.26.N.C.GASK Gasket set, with a flat and L-shaped gasket, for above plate seat.

ADDITIONAL DOUBLE SEAL COMPONENTS, FOR WATER JACKETED PUMPS, WITH EXTERNAL SEAL = E and F

- XXXX.26.S.S.PLAT STK 26 Stainless Steel backing plate with flush connection holes.
- XXXX.18.N.C.SEAL STK 18 inboard rotary, with Nitrile bellow and Carbon face.


ANCILLARY INFORMATION.

All parts are fitted with Nitrile elastomers as standard. If E.P. or Viton® are required, please specify this, by replacing 'N' in the code with 'E' or 'V'.
A 'Y' Pre-fix to the code, denotes F.D.A. / E.C. Regulation compliant.


Stramek also manufacture the following square-section replacement gaskets to suit the body of the APV Puma® pump;

- P.7"BODYSEAL Square section Nitrile gasket, with 7.0" I.D.
- P.9"BODYSEAL Square section Nitrile gasket, with 9.0" I.D.
- P.11"BODYSEAL Square section Nitrile gasket, with 11.0" I.D.

XXXX.26.N.C.GASK



XXXX.26.S.S.PLAT



XXXX.18.N.C.SEAL

