




New sanitary strainer range, available in angle-type Strainer and Y-type Strainer. Sanitary connections DIN11851 and sieve filters of 200/500 and 1000 microns. These filters can be installed in a great variety of applications: for the food industry, cosmetic industry, some chemical industries and auxiliary services in the pharmaceutical industry. With a sanitary design, they are used to keep dangerous particles away from pumps or other equipment.

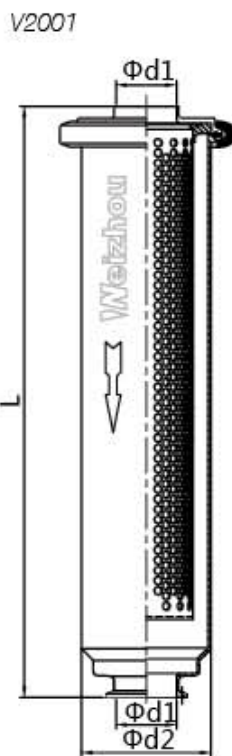


Welded Straight Strainer **DIN**

DN	d1	d2	L
25	26	70	386
32	32	70	386
40	38	70	472
50	50	70	472
65	66	114.3	648
80	81	129.0	648
100	100	139.7	798

INCH

Size	d1	d2	L
1"	22.1	70	377
1-1/2"	34.8	70	462
2"	47.5	70	637
2-1/2"	60.2	114.3	637
3"	72.9	114.3	748
4"	97.4	129.0	748

V2002

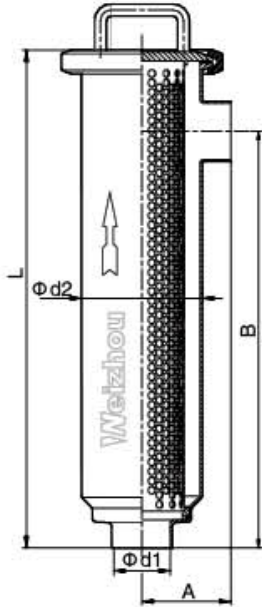

Welded angle-type Strainer


DIN

DN	d1	d2	A	B	L
25	26	70	75	250	306
32	32	70	75	250	306
40	38	70	75	250	306
50	50	70	75	300	406
65	66	114.3	100	380	503
80	81	129.0	110	420	561
100	100	139.7	125	500	660

INCH

Size	d1	d2	A	B	L
1"	22.1	70	75	250	306
1-1/2"	34.8	70	75	250	306
2"	47.5	70	75	300	406
2-1/2"	60.2	114.3	100	380	503
3"	72.9	114.3	100	420	561
4"	97.4	139.7	125	500	660

V2003

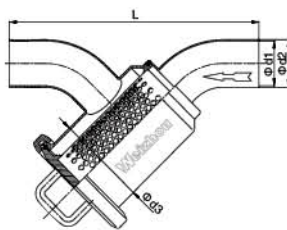


Welded Y-type Strainer

DIN

DN	d1	d2	d3	L
25	26	70	76.2	235
32	32	70	76.2	240
40	38	70	101.6	260
50	50	70	101.6	280
65	66	114.3	114.3	320
80	81	129.0	114.3	375
100	100	139.7	154	400

V2004

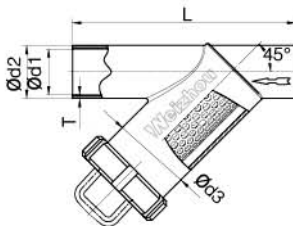

INCH

Size	d1	d2	d3	L
1"	22.1	70	76.2	213
1-1/2"	34.8	70	101.6	242
2"	47.5	70	114.3	300
2-1/2"	60.2	114.3	114.3	348
3"	72.9	114.3	154	378
4"	97.4	139.7	154	468